

iCerMax™ - 3 M Steel Ceramic filter

Technical data: Standard unit

Description: 3 M Steel Ceramic Filters (STD)

Part no: 3 M

1 3 M Steel Ceramic Filter

Flow Rate Max: 300 ltr/pm

Micron Rating: 5, 10, 15 elements

Diesel Vol.: 38 ltr

Mass Vol: 76 kg

Mass Empty: 45 kg

Height 1097 mm

Width 212 mm

Port size 1 ½ inch

(Reduced) STD 1 inch

Valves 2

Max pressure 4 Bar

Gauges 2

Clean pressure drop 0.2 Bar

Mini mesh sample 2

Consumables Cartridges filtration

Utilize three 1M ceramic filter

(Supplied with three cartridge installed)


Highly versatile unit

The unit is highly effective in dealing with particle contamination on a sustainable basis. With easy installation, maintenance low.

Mini mesh unit ideal to “Bleed” air

Extras

- Custom stand

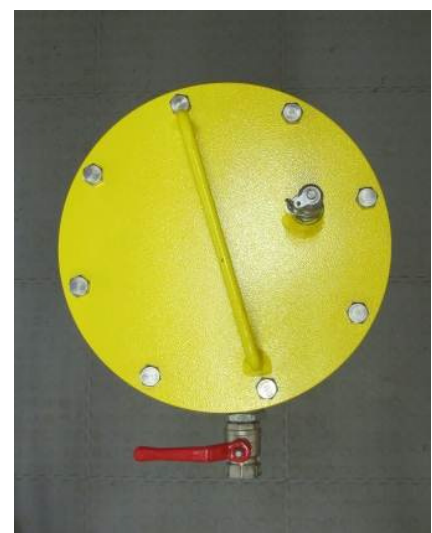

Ideal application

Kerbside pumps addressing particle contamination effectively



Kerbside pumps in conjunction with iCerMax™ water Coalescer, addressing water and particle contamination efficiently



Kerbside pumps in conjunction with iCerMax™ Bag filter, addressing high particle contamination



Side view inside