

iCerMax™ - S2 Combo unit 7M- (STD)

Custom designed units to Client specification

Technical data: Standard unit

Description: S2 Combo unit (STD)

- 1 Bag filter
- 1 7M Seven Steel Filter (7 Meters of Ceramic)
- 1 Auto coalesce two stage Water Separator
  - 1 Water trap - Tray (optional)
  - 2 Water trap - Cage (optional)
- 1 Combo Stand

All fully connected with single inlet /outlet

Part no: S2

Flow Rate Max: 300 ltr/pm

Micron Rating: 1, 5, 10, 15 elements

Diesel Vol.: 239 ltr

Mass Vol: 409 kg

Mass Empty: 221 kg

Height 1350 mm

Length: 1100 mm

Width 960 mm

Port size STD 1 ½ inch

Pipe fitted – hydraulic 1 ½ inch


Valves 4

Max pressure 4 Bar

Gauges 4

Clean pressure drop 0.2 Bar

Mini mesh sample 3

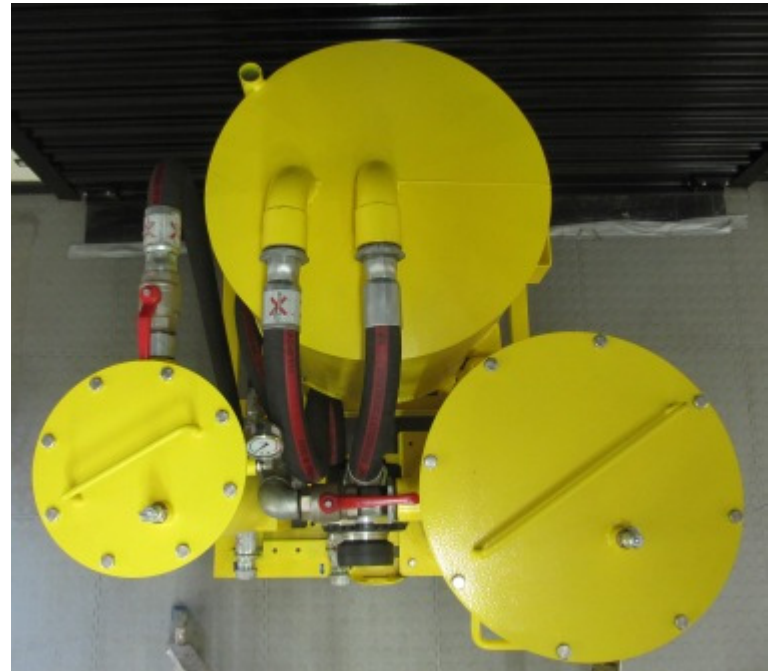


We thank you for acquiring the combo unit. The unit is highly effective in dealing with particle and free water contamination on a sustainable basis. With easy installation and low maintenance required.

The unit allows five stage filtration. This is required for effective, sustainable cleanliness levels in any filtration system, especially in Africa. Providing unsurpassed sustainable cleanliness levels at bulk tanks



Effective one stop solution for particle and water contamination, at bulk tanks. With easy maintenance, indicated on dispense flow rate and pressure gauges

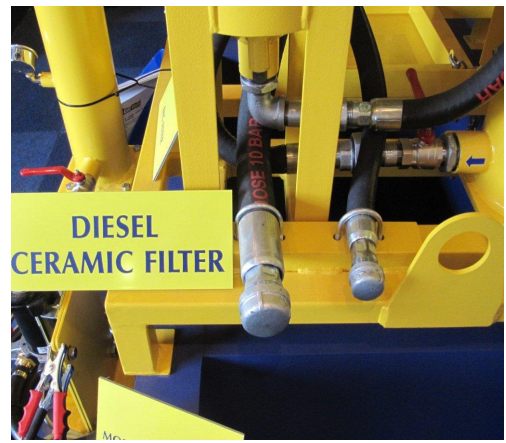

Ease of installation: just connect inlet and outlet hoses to combo – no expensive installation fees, Modular Bases


with 12 Skid Combinations to address any Bulk Tank, on actual flow rates and contamination levels



Sustainable Ceramic Depth filtration –iCerMax™

- Ensure sustainable cleanliness levels
- Ensure accurate monitoring
- Large Ceramic Elements

[www.iCerMax.com](http://www.iCerMax.com) for detail why ceramics is a superior filtration medium

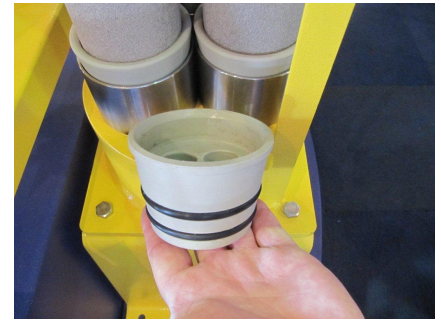

No compromise on Seals, ensure sustainable cleanliness levels maintained




Large clear water bowl, indicator with Float,

Ideal indicator of water in fuel and drain only water into tray. KEY to verify/ trace “amber diesel “and “black diesel” and note supplier in real time.

Efficiency not affected by high water levels or particle contamination on filtration mediums.

100 % Auto water dumping system available

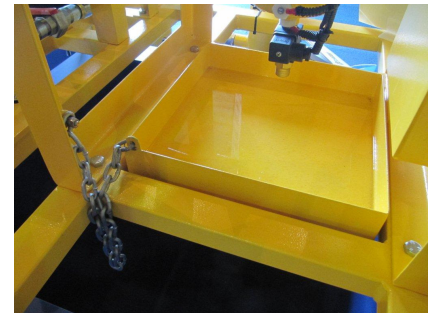

Differential pressure gauges fitted to both particle filters. Two Mini mesh sample units (inlet and outlet), to monitor sustainable cleanliness levels. Drain valves for easy cleaning.

